


# Universeal

## flexiGrip™ 500 M ISO Cable Seal – Technical Specifications

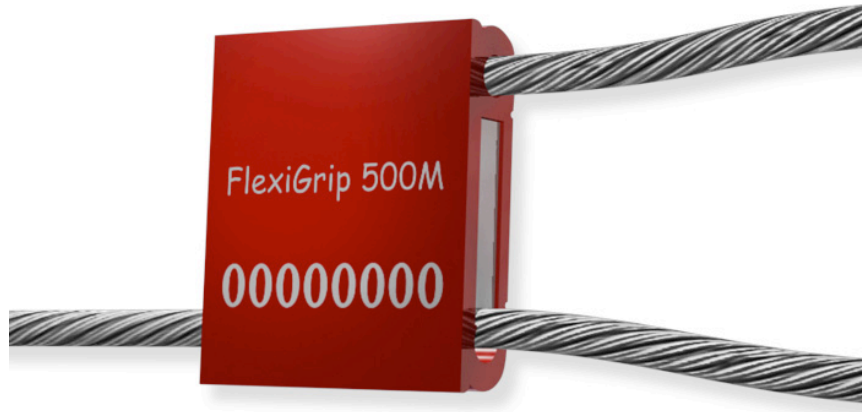

### Physical Strength

Pulling load resistance	20 kN
ISO 17712 classification	<b>High Security Seal</b> (suitable for C-TPAT operations) <b>Compliant with new ISO FDIS 17712</b>

### Material and Dimensions

Body	<b>Aluminium alloy</b> <b>30 mm x 38 mm x 10 mm</b>
Cable	<b>Non preformed galvanized aircraft cable</b>
L x H x T	<b>5,0 mm</b>
Diameter	<b>300 mm</b>
Usable length	<b>Zinc alloy</b>
Mechanism	<b>Spring steel (Heat treated)</b>
Flat spring	<b>Steel (Heat treated)</b>
Roller	

### Colours and Printing

Marking zone	<b>30 mm x 33 mm</b>
Printing type	<b>Laser</b>
Printing specifications	First line: <b>Customer ID</b> , Second line: <b>Numbering</b>
Customer ID	Standard: <b>Alphanumeric</b> , Optional: <b>B&amp;W graphic logo</b>
Numbering	<b>Alphanumeric or Barcode</b>
Standard colours (anodized)	<b>Red, Green, Blue, Dark Blue, Yellow, Orange, Grey, Black</b>

### Packaging

Bundle	<b>10 pieces sequentially attached with rubber band</b>
Seals per carton	<b>100 pieces in 10 bundles</b>
Carton dimensions	<b>310 mm x 280 mm x 130 mm</b>
Carton weight	<b>Approx. 6,5 kg</b>

*Note : Universeal reserves the right to change specifications without prior notice.*

January 2011

